
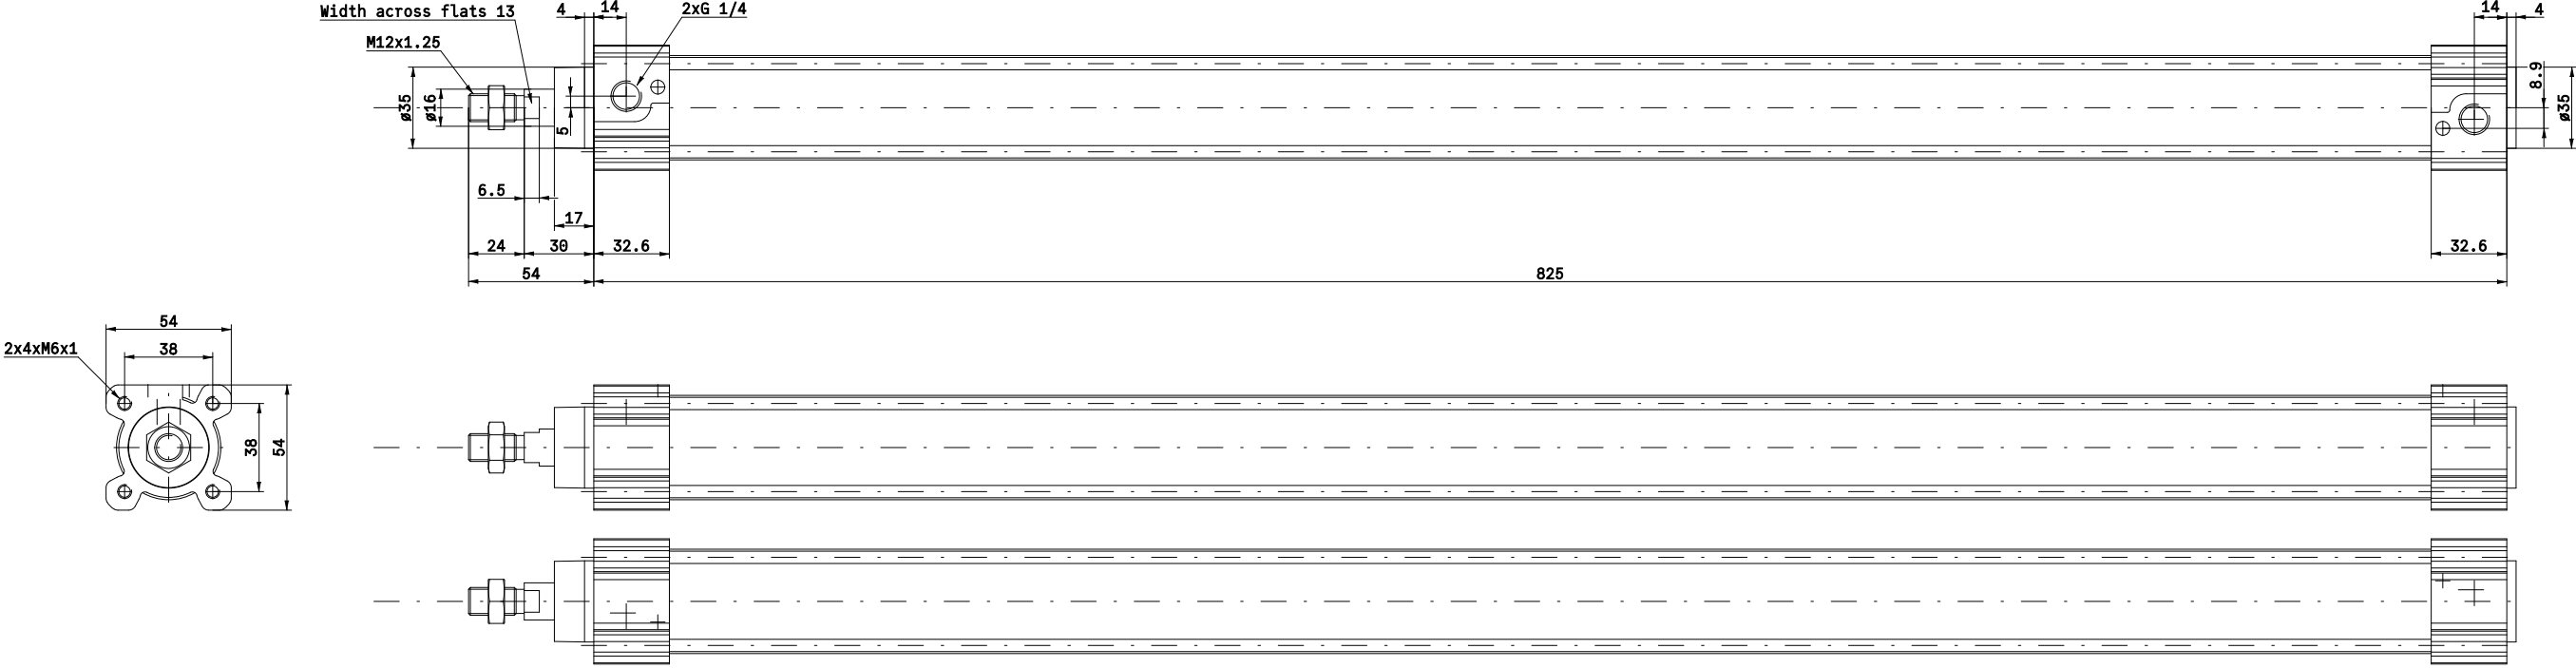





Projection		Scale	Free	DATE	05-29-2025
Drawing No.	C96SDB40-720C				

C96SDB40-720C(0_1_0)

ISO Cylinder:Standard Double Acting,Single Rod

3D View

To activate the interactive 3D view, you must trust this document (see hint on the top) in Adobe Acrobat and click on the question mark.

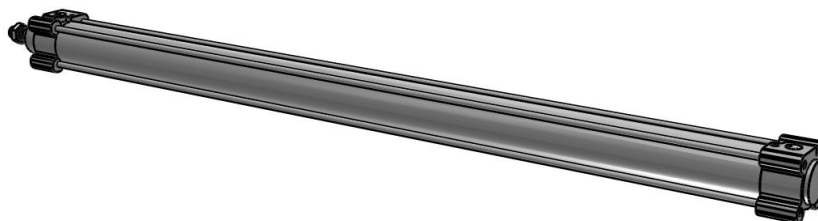

C96SDB40-720C(0_1_0)

ISO Cylinder:Standard Double Acting,Single Rod

Technical Data

BORE (Bore size / mm)	40
MOUNT (Mounting style)	(B) Basic
MAGNET (Built-in magnet)	(D) With magnet
AUTOSWITCH (Auto switch)	(-) Without autoswitch
LEAD (Lead wire length)	N/A
NUMBER (Number of auto switches)	N/A
STROKE (Stroke / mm)	720
POS (Position / mm)	0
CUSHION (Cushion)	(C) Air cushion on both ends + Bumper cushion
ROD (Rod)	(-) Single rod
BOOT (Rod boot)	(-) Without boot
STOP (Stroke option)	Manufacturable stroke
COM (Comment)	Please confirm the conditions of use with SMC
OMSC (Made to order)	(-) Without order
THREAD (Thread on/off)	on