

TB-EE-DB 250/1+11 - Distribution block



1725169

<https://www.phoenixcontact.com/ca/products/1725169>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distribution block, nom. voltage: 1000 V, nominal current: 232 A, Thermal continuous current I_{th} : 250 A, number of connections: 12, number of positions: 1, connection method: Screw connection, Rated cross section: 95 mm², Line contact, cross section: 35 mm² - 120 mm², Screw connection, Load contact, cross section: 2.5 mm² - 35 mm², mounting type: NS 35/7,5, NS 35/15, Direct mounting, color: dark gray

Your advantages

- Fast installation via ready-to-connect distributor and collection block
- Blocks can be snapped to each other to form function groups
- As well as saving space, the compact design enables user-friendly wiring in a small amount of space
- Flexible use, thanks to DIN rail and direct mounting
- Reversible cover for optimum readability of the technical data

Commercial data

Item number	1725169
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BE01
Product key	BEK825
GTIN	4067923280717
Weight per piece (including packing)	443.3 g
Weight per piece (excluding packing)	443.3 g
Customs tariff number	85369010
Country of origin	IN

Technical data

Notes

General

Note	The maximum load current of a single clamping unit must not be exceeded.
	For power distribution applications, IEC 60364-4-43:2008; modified + corrigendum Okt. 2008 (DIN VDE 0100-430:2010-10) section 433.2 ff must be observed!

Product properties

Product family	TB
Area of application	Machine building
Number of positions	1
Number of connections	12
Number of rows	1

Insulation characteristics

Degree of pollution	3
---------------------	---

Electrical properties

Rated surge voltage	8 kV
---------------------	------

Connection data

Number of connections per level	12
Nominal cross section	95 mm ²
Rated cross section AWG	000

Line contact

Connection method	Screw connection
Screw thread	M14
Number of connections	1
Note	Ferrules are mandatory when using flexible conductors
Tightening torque	19 ... 21 Nm
Stripping length	28 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	35 mm ² ... 120 mm ²
Cross section AWG	0 ... 000 (converted acc. to IEC)
Flexible conductor cross-section (ferrule with plastic sleeve)	35 mm ² ... 95 mm ²
Nominal cross section	95 mm ²
Thermal continuous current I _{th}	250 A
Nominal current	232 A
Nominal voltage	1000 V AC (suitable for 1500 V DC)

Load contact

TB-EE-DB 250/1+11 - Distribution block



1725169

<https://www.phoenixcontact.com/ca/products/1725169>

Connection method	Screw connection
Screw thread	M8
Number of connections	2
Note	Ferrules are mandatory when using flexible conductors
Tightening torque	3.5 ... 5 Nm
Stripping length	11 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	2.5 mm² ... 35 mm²
Cross section AWG	12 ... 2 (converted acc. to IEC)
Flexible conductor cross-section (ferrule with plastic sleeve)	2.5 mm² ... 25 mm²

Load contact

Connection method	Screw connection
Screw thread	M6
Number of connections	5
Note	Ferrules are mandatory when using flexible conductors
Tightening torque	2 ... 3 Nm
Stripping length	11 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	2.5 mm² ... 16 mm²
Cross section AWG	12 ... 6 (converted acc. to IEC)
Flexible conductor cross-section (ferrule with plastic sleeve)	2.5 mm² ... 16 mm²

Load contact

Connection method	Screw connection
Screw thread	M6
Number of connections	4
Note	Ferrules are mandatory when using flexible conductors
Tightening torque	2 ... 3 Nm
Stripping length	11 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	2.5 mm² ... 10 mm²
Cross section AWG	12 ... 8 (converted acc. to IEC)
Flexible conductor cross-section (ferrule with plastic sleeve)	2.5 mm² ... 10 mm²

Dimensions

Width	46.2 mm
Height	96 mm
Depth	60 mm
Depth on NS 35/7,5	61.5 mm
Depth on NS 35/15	69 mm

Material specifications

Color	basalt gray (RAL 7012)
Flammability rating according to UL 94	V0

TB-EE-DB 250/1+11 - Distribution block



1725169

<https://www.phoenixcontact.com/ca/products/1725169>

Insulating material group	I
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Electrical tests

Surge voltage test

Test voltage setpoint	9.8 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 95 mm ²	11.4 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	3.82 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 35
Result	Test passed

Test for conductor damage and slackening

Rotation speed	9 rpm
Revolutions	135
Conductor cross-section/weight	2.5 mm ² / 0.7 kg
	16 mm ² / 2.9 kg
	35 mm ² / 6.8 kg
	120 mm ² / 14 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	5 s
Result	Test passed

Ambient conditions

TB-EE-DB 250/1+11 - Distribution block



1725169

<https://www.phoenixcontact.com/ca/products/1725169>

Degree of protection	IP10
Ambient temperature (operation)	-40 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60947-7-1
	IEC 60947-7-1
	IEC 60947-7-1
	IEC 60947-7-1

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	Direct mounting

Drawings

Circuit diagram

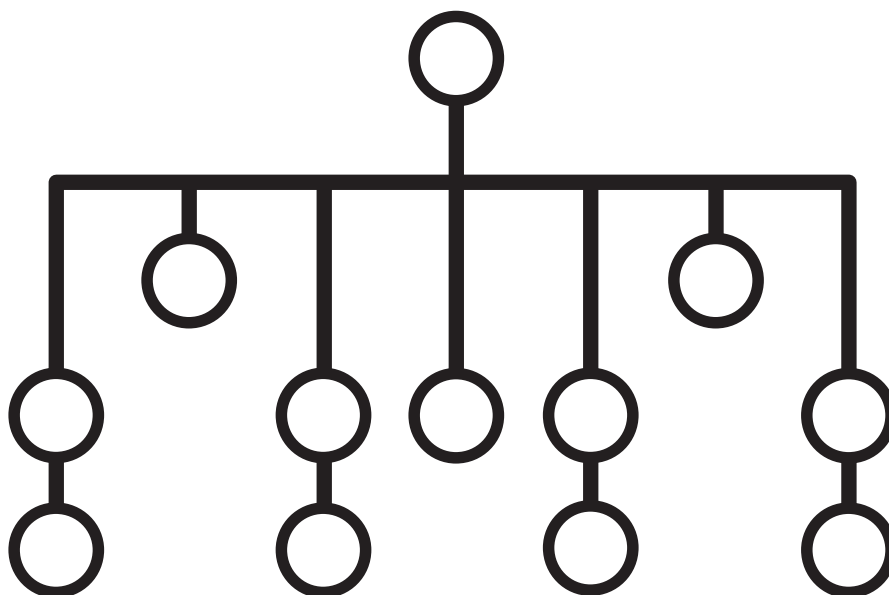

TB-EE-DB 250/1+11 - Distribution block



1725169

<https://www.phoenixcontact.com/ca/products/1725169>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/1725169>



UL Recognized

Approval ID: E60425



CSA

Approval ID: 80247697

TB-EE-DB 250/1+11 - Distribution block



1725169

<https://www.phoenixcontact.com/ca/products/1725169>

Classifications

ECLASS

ECLASS-13.0	27250118
ECLASS-15.0	27250118

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

TB-EE-DB 250/1+11 - Distribution block



1725169

<https://www.phoenixcontact.com/ca/products/1725169>

Accessories

UCT6M-TM 5 - Marker for terminal blocks

0830756

<https://www.phoenixcontact.com/ca/products/0830756>



Marker for terminal blocks, for marking ABB terminal blocks from the SNK series, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 60, text field height: 11.3 mm, text field width: 4.17 mm

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/ca/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/ca/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/ca/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/ca/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/ca/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/ca/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/ca/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/ca/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/ca/products/1206560>



DIN rail end piece, for DIN rail NS 35/7.5

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/ca/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/ca/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/ca/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/ca/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/ca/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/ca/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/ca/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/ca/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

TB-EE-DB 250/1+11 - Distribution block

1725169

<https://www.phoenixcontact.com/ca/products/1725169>



NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/ca/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd

8240 Parkhill Drive

Milton, Ontario L9T 5V7

1-800-890-2820

cdinfo@phoenixcontact.ca